

Commercial & Industrial Unit Heaters

Hot Dawg® Low Profile

- Gas fired, power exhausted
- 80% thermal efficiency
- Horizontal or vertical venting
- Field convertible to propane
- Low profile casing
- Hot surface ignition
- 100% shut-off w/continuous retry
- Mounting brackets supplied
- Commercial or residential applications



Hot Surface Ignition, Natural Gas

Part #	Mfg #	---BTU/hr---		Vent Dia (In)	CFM @70°F	Air Temp Rise (°F)	Max Mounting Ht (Ft)	Heat Throw (Ft)	Motor HP	Price
		Input	Output							
358-0030	HD30AH0134	30,000	24,000	3 or 5	505	44	10	25	1/25	1046.19
358-0045	HD45AH0134	45,000	36,000	3 or 5	720	46	10	27	1/15	1090.32
358-0060	HD60AH0134	60,000	48,000	3 or 5	990	45	12	36	1/12	1211.04
358-0075	HD75AH0134	75,000	60,000	3 or 5	1,160	48	14	38	1/12	1243.49

Gas-Fired Power Vented Propeller Unit Heaters

- CSA certification for use in the US and Canada
- 80% thermal efficiency
- Power exhauster motor
- Differential pressure switch for proof of venting
- Aluminized steel heat exchanger
- Aluminized steel burner w/stainless steel separator strip
- Certified to 0.5" wc external static pressure
- Single stage intermittent pilot with continuous retry control system for operation on natural gas
- High limit safety control
- Control terminal board
- Adjustable motor sheaves on blower motors
- Totally enclosed fan/blower motors



Intermittent Pilot Ignition, 115/60/1, Natural Gas

Part #	Mfg #	---BTU/hr---		Vent Dia (In)	CFM @70°F	Air Temp Rise (°F)	Max Mounting Ht (Ft)	Heat Throw (Ft)	Motor HP	Price
		Input	Output							
358-0420	PDP30AE0130	30,000	24,000	3-4	440	51	7	25	1/40SP	1005.95
358-0421	PDP50AE0130	50,000	40,000	3-4	740	50	9	33	1/40SP	1048.79
358-0422	PDP75AE0130	75,000	60,000	4	1100	51	12	41	1/12PSC	1116.28
358-0424	PDP125AE0130	125,000	100,000	4	1850	50	14	51	1/8PSC	1497.90
358-0426	PDP175AE0130	175,000	140,000	5	2550	51	17	59	1/6PSC	1789.95

Gas-Fired Gravity Vent Propeller Unit Heaters

- CSA certification for use in the US and Canada
- 80% thermal efficiency
- Blocked vent safety switch
- 20 gauge aluminized steel cabinet
- 115v control step down transformer with 24v gas controls
- Aluminized steel heat exchanger
- Aluminized steel burner w/stainless steel separator strip
- Certified to 0.5" wc external static pressure
- Single stage standing pilot control system
- High limit safety control
- Control terminal board
- Adjustable motor sheaves on blower motors
- Totally enclosed fan/blower motors




Standing Pilot, 115/60/1, Natural Gas

Part #	Mfg #	---BTU/hr---		Vent Dia (In)	CFM @70°F	Air Temp Rise (°F)	Max Mounting Ht (Ft)	Heat Throw (Ft)	Motor HP	Price
		Input	Output							
358-0272	PD50AA0111	50,000	40,000	4	740	50	9	33	1/40SP	961.82

Intermittent Pilot Ignition, 115/60/1, Natural Gas

High Efficiency II™ - Propeller

- Gas-fired, power-exhausted
- 80% Thermal efficiency
- Rotating power exhaust
- Horizontal or vertical venting
- Field convertible to propane
- Field adjustable level hanging
- Intermittent pilot ignition
- 100% Shut-off w/continuous retry

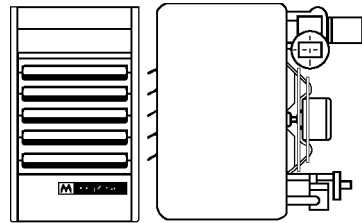


LP Kits

Part #	Mfg #	Description	Price
358-1415	28043	For PD30	46.73
358-1417	28044	For PD50	46.73
358-1419	28046	For PD100	51.92
358-1421	28047	For PD125	51.92
358-1422	28048	For PD150	51.92
358-1423	28049	For PD175	58.41
358-1424	28050	For PD200	58.41
358-1918	31668	For HD Series	48.03
358-0600	93880	For PAE30	44.14
358-0601	93881	For PAE50	44.14
358-0603	93883	For PAE100	48.03
358-0604	93884	For PAE125	48.03
358-0605	93885	For PAE145	53.22
358-0606	93886	For PAE175	53.22
358-0607	93887	For PAE200	53.22
358-0700	93999	For PV-75	44.14




SNAPPY

Pipe & Fittings
Snaplock Pipe




Part #	Mfg #	Size	Price
390-0454	1	8" x 2"	3.72

90° Elbows



Part #	Mfg #	Size	Gauge	Price
390-1690	3	4"	26	3.22

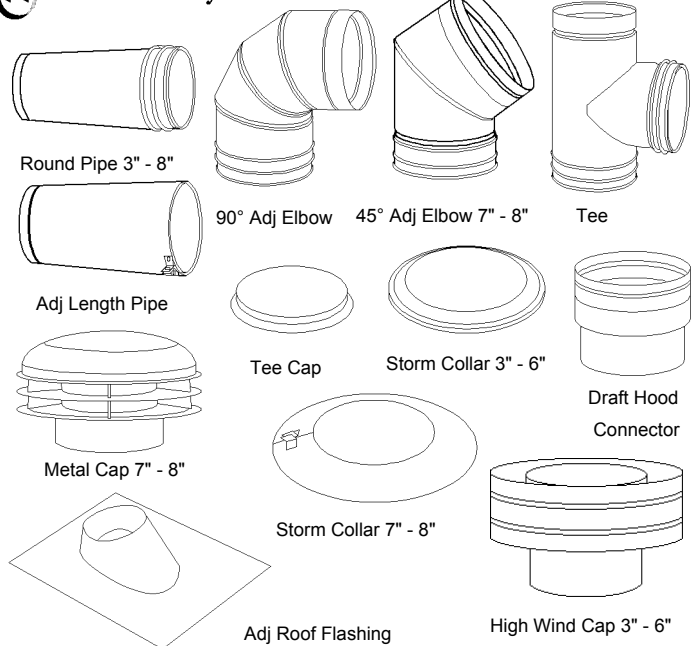

*We Feature The Brand Name Products
You Are Looking For*

Type B Gas Vent & Pipe Fittings
3" Gas Vent

Part #	Mfg #	Model	Description	Price
389-0444	16005	3RP18	18" Round Pipe	13.42
389-0276	16004	3RP24	24" Round Pipe	17.62
389-0138	16003	3RP3	3' Round Pipe	23.62
389-0074	16002	3RP4	4' Round Pipe	29.79
389-0016	16001	3RP5	5' Round Pipe	36.64
389-0646	16008	3RPA	12" Adj Length	13.42
389-0822	16009	3RPA90	90° Adj Elbow	29.65
389-1462	51666	3RHW	Metal High Wind Cap	18.16
389-2296	16018	3DRH	Draft Hood Connector	9.05
389-1744	16019	3RF	Adj Flashing 0/12 - 6/12	11.71
389-2028	16021	3RS	Storm Collar	3.22

4" Gas Vent

Part #	Mfg #	Model	Description	Price
389-0452	16104	4RPX18	18" Round Pipe	16.13
389-0284	16103	4RPX24	24" Round Pipe	21.05
389-0146	16102	4RPX3	3' Round Pipe	28.51
389-0082	16101	4RPX4	4' Round Pipe	36.64
389-0024	16100	4RPX5	5' Round Pipe	44.14
389-0830	16108	4REA90	90° Adj Elbow	35.52
389-1470	51667	4RHW	Metal High Wind Cap	18.65
389-1752	16117	4RF	Adj Flashing 0/12 - 6/12	13.12
389-2036	16119	4RS	Storm Collar	3.22

5" Gas Vent				
Part #	Mfg #	Model	Description	Price
389-0292	16203	5RP24	24" Round Pipe	25.67
389-0090	16201	5RP4	4' Round Pipe	42.39
389-0848	16208	5REA90	90° Adj Elbow	43.06
389-1488	51668	5RHW	Metal High Wind Cap	25.20
389-2318	16216	5RDH	Draft Hood Connector	12.50
389-2044	16219	5RS	Storm Collar	7.22

6" Gas Vent				
Part #	Mfg #	Model	Description	Price
389-0478	16304	6RP18	18" Round Pipe	22.01
389-0306	16303	6RP24	24" Round Pipe	30.07
389-0162	16302	6RP3	3' Round Pipe	39.48
389-0104	16301	6RP4	4' Round Pipe	50.30
389-0040	16300	6RP5	5' Round Pipe	58.69
389-0856	16308	6REA90	90° Adj Elbow	50.15
389-1630	16313	6RTC	Tee Cap	4.87
389-1496	51669	6RHW	Metal High Wind Cap	31.67
389-2326	16317	6RDH	Draft Hood Connector	12.90
389-2052	16320	6RS	Storm Collar	7.71
389-1778	16318	6RF	0/12 - 6/12 Flashing	29.45

7" Gas Vent				
Part #	Mfg #	Model	Description	Price
389-0170	16402	7RP3	3' Round Pipe	58.13
389-0058	16400	7RP5	5' Round Pipe	85.84
389-0864	16407	7REA90	90° Adj Elbow	78.90
389-0776	16409	7RT7	Tee	71.81
389-1500	16412	7RM	Metal Cap	42.39
389-2334	16413	7RDH	Draft Hood Connector	15.52
389-1786	16414	7RF	Adj Flashing 0/12 - 6/12	36.91
389-2060	16416	7RS	Storm Collar	8.30


8" Gas Vent				
Part #	Mfg #	Model	Description	Price
389-0322	16503	8RP24	24" Round Pipe	49.63
389-0188	16502	8RP3	3' Round Pipe	64.87
389-0066	16500	8RP5	5' Round Pipe	102.24
389-0872	16507	8REA90	90° Adj Elbow	81.96
389-1018	16508	8REA45	45° Adj Elbow	47.26
389-0784	16509	8RT8	Tee	78.68
389-1656	16510	8RTC	Tee Cap	10.08
389-1518	16513	8RM	Metal Cap	56.45
389-1794	16515	8RF	Adj Flashing 0/12 - 6/12	40.46
389-2078	16517	8RS	Storm Collar	9.05

Lane Vent-Fast, Inc.

LANE_VENT-FAST

Gas Vent Hangers

- Use on type B double wall gas vents
- The 3" can be used in PVC applications
- Produces rigid vent installation, can support over 200 lbs
- Can be placed anywhere on pipe



Part #	Mfg #	Size	Price
389-9678	VF03	3"	16.48
389-9686	VF04	4"	20.73
389-9694	VF05	5"	24.09
389-9708	VF06	6"	25.74
389-9716	VF07	7"	14.71
389-9724	VF08	8"	15.41

***Buy from your wholesaler.
As your wholesaler, we
carry your stock of
merchandise. You'll
appreciate our service,
and we appreciate your
business.***

Electromechanical Non-Programmable Thermostats

T87N The Round®

- Provides electronic control of 24 VAC heating and cooling systems
- Separate temperature setting and thermometer
- Electrical ratings: 18 to 30 VAC
- Classic twist dial
- 3-11/16" Diameter x 1-3/4" Deep
- T87N1026 is an Easy-To-See model and includes 6" cover ring and switch position labels




Part #	Mfg #	Application	System Switching	Fan Switching	Terminal Designations	Color	Price
651-4440	T87N1000	Heat only	OFF-Heat	-	R, W, Y	Premier White	93.34

Line & Low Voltage Commercial Thermostats

T451A Light Duty Line Voltage with Thermometer

- SPST switching action, makes on temperature fall, breaks on temperature rise
- Heat/Cool thermostat
- Control line voltage on valves, motors, contactors, electric heat elements, duct furnaces, & fan coil units in heating/cooling systems
- Automatic cooling & heating anticipation
- Mount on standard vertical or horizontal outlet box
- 120-277 Vac




Part #	Mfg #	Temp Range	Switching Action	Includes:	Price
651-4700	T451A3005	44° - 86°F	SPST, Breaks on Rise	with Thermometer	116.26

Gas Burner/Ignition Controls

S8610U Universal Intermittent Pilot Module


- Field service replacement for most Honeywell, Robertshaw, Johnson & UTEC (HSC) intermittent pilot ignition modules. Provides electronic control of most intermittent pilot ignition systems used on gas-fired furnaces, boilers & other heating appliances
- For use in systems w/combination ignitor-sensor (single rod or dual rod sense)
- 100% pilot gas shutoff & lockout on loss of pilot flame
- Includes relay contacts for use with any intermittent pilot gas control string w/max 1.0A pilot or 2.0A main valve rating
- Honeywell VR8204, VR8304 or VR8345M combination gas control recommended
- Functional equivalent of S86, S8600, S8610 & S90 modules
- Includes spark cable adapters to allow field replacement of both Honeywell & competitive controls without replacing existing spark cable
- Includes remote reset & automatic vent damper plug



Part #	Mfg #	Description	Price
651-3800	S8610U1003	NG or LP Gas, 90 Second Trial for Ignition, 5 Minute Wait	219.64

Gas Burner/Pilot Assemblies

Q340 Thermocouples




Part #	Mfg #	Description	Price
650-9184	Q340A1066	18" Lead 30mV Replacement Thermocouple	14.45
650-9206	Q340A1074	24" Lead 30mV Replacement Thermocouple	15.30
650-9222	Q340A1082	30" Lead 30mV Replacement Thermocouple	15.89
650-9248	Q340A1090	36" Lead 30mV Replacement Thermocouple	16.37

Hydronic Controls

V8043/V8044 Low Voltage Hydronic Zone Valves

5000 Series Two Position Normally Closed Straight-Through Motorized Valve

- Motorized actuator and valve assembly for controlling flow of hot water to a heat exchanger
- With end switch & manual opener
- Terminal board
- 125°F maximum ambient temperature
- 24V, 50/60 Hz



Part #	Mfg #	Description	Price
652-0875	V8043F5036	3/4" SWT, 3.5 Cv Flow Capacity, 300 psi, w/Terminal Board & End Switch	199.74
652-0880	V8043F5051	1" SWT, 3.5 Cv Flow Capacity, 300 psi, w/Terminal Board & End Switch	223.48

Zone Valve Conversion Kit for V8043F

Part #	Mfg #	Description	Price
652-8180	40003916-048	2-Way Powerhead Assembly, 24V @ 60hz	135.34

Hydronic Switching Relay

- Provide intermediate switching of line voltage device from low voltage controller
- Integral transformer provides low voltage power f/control circuit
- Color-coded leadwires for easier wiring
- 50/60 Hz
- Provides DPST switching for hot water zone control systems, or SPST control of two separate loads




Part #	Mfg #	Description	Price
651-3354	RA832A1066	DPST 120V 50/60 Hz Enclosed 2-Wire For Two Line Voltage Loads	169.63

Aquastats®

L4006/L6006 Single Function Aquastat® Controls

- Immersion type controllers for limiting or regulating temperatures of liquids in boilers or tanks
- Totally enclosed Micro Switch™ snap-acting switches operate on temperature rise to setpoint

L4006A Immersion Type, High or Low Limit, SPST Contacts Break on Temp Rise

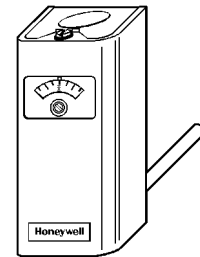

Part #	Mfg #	Temperature Operating Range	Temperature Differential, Midscale	Includes:	Price
650-4924	L4006A1678	100-240°F	5-30°F Adj	3" Insulation, Stop Factory-Set @240°F, Well Adapter & Heat-Conductive Compound	180.06

L6006C Strap-On Mount, Circulator Control & High Limit & Low Limit, SPDT

- Stop factory-set at 200°F, well adapter & heat-conductive compound




Part #	Mfg #	Temp Operating Range	Temp Differential, Midscale	Includes:	Price
650-6082	L6006C1018	65°-200°F	5-30°F Adj	Bracket f/Mounting	178.84

Aquastat® Relays

L8148 Aquastat® Relays

- Immersion-type controllers that combine high limit protection with switching relay control of burner & circulator motors
- High limit opens burner circuit only
- Includes transformer & accessory terminals for adding a remote low limit controller
- Requires 24 Vac thermostat w/heat anticipator set @0.2 amps
- Includes well adapter & heat-conductive compound
- Mounts horizontally or vertically
- Max Bulb: 40° over selected setpoint up to 265°F
- Max Ambient: 150° including zone valves w/low voltage loads up to 1.2 amps




Part #	Mfg #	Description	Price
650-6646	L8148J1009	Millivolt or Low Voltage, 140°-240°F High Limit, 4-1/2" Capillary	347.76

Transformers

AT72 NEMA Standard Transformers

- 24V control circuit step-down transformer designed to power any 24V control system, including thermostats, gas valves & relays
- NEMA Type D, meets 'NEC Class 2 Not Wet, Class 3 Wet' & UL 1585 requirements
- 9" Leadwires (primary)
- Combination mount can be foot-mounted, plate-mounted on 4 x 4", 4" octagon or 2 x 4" electrical boxes (transformer all above or 3/4 above plate) or clamp-mounted via a junction box knockout



Part #	Mfg #	Output (100 % Factor)	Primary Voltage @ 50/60 Hz	Secondary Voltage (Open Circuit)	Electrical Connections Secondary	Price
650-0194	AT72D1683	40VA	120V	26.5	2 Screw Terminals	46.67

INDEPENDENT WHOLESALE DISTRIBUTOR



Honeywell Accessories & Parts

Part #	Mfg #	Description	Price
652-5722	121371B	Well Assembly, Copper 3/4" NPT, 1-1/2" Insulation, 3" Insertion Well w/Mtg Clamp	49.06
652-5852	123870A	Well Assembly Copper 3/4" Npt	46.92
652-8200	40003918-006	2 Way Water Powerhead Conversion Kit	29.51
652-7612	802360JA	24V Sealed Replacement Motor For V8043/V8044	59.34

Controls

Part #	Mfg #	Description	Price
652-8175	40003916-043	Powerhead Control	139.65

Nashua

Foil Tapes

322 Premium Foil Tape

- Dead-soft with aggressive adhesive
- 2 mil Aluminum foil backing
- Conformability to curved surfaces



Part #	Mfg #	Size	Price
442-0044	322	3"	23.73

Duct Tapes

398 Multi-Purpose Duct Tape


- Conforms will to irregular surfaces
- Excellent adhesion to a wide variety of surfaces
- Tears straight, hangs straight, curl resistant
- Easy unwind



Part #	Mfg #	Size	Color	Price
442-0038	398	2"	Silver	13.53

Clear Vinyl Tubing

- 75 Duro clear
- Self-dispensing cartons
- FDA Approved
- -5°F to +125°F



Part #	Mfg #	ID	OD	Wall	Length	Price
409-3847	T26-625	5/8"	7/8"	1/8"	100'	1.52

Border States Electric Supply

Thermostat Wire

- 18 Awg CL-2 UI

Part #	Mfg #	Description	Price
203-3606	CLII	CLII 18/2, 2-Conductor	0.18
204-2850	18/3	18/3 Stat Wire	0.26



Thermostat Wire

- 250' Roll

Part #	Size	Price/Foot
527-3200	18/5 Thermostat Wire	0.39

**THERE'S JUST NOT
ENOUGH SPACE**

To list all of the material and services we can offer you.

Prices in this catalog are subject to change without notice. Please call us for a quote